

IRISS Safe-Connect TSK-3 Service Kit

Overtemperature Indicator Labels and Paint

Overview

The TSK-3 Safe-Connect[™] Service Kit are visual overtemperature indicators for electrical assets. Using a patented Thermochromic technology, these easily-installed labels provide a colorchanging visual indicator that work in tandem with IR inspection windows from IRISS as part of the visual component in the inspection process prior to and between infrared and ultrasound inspections. With a memory-effect feature, these non-conducive labels provide inspectors with a permanent visible warning of an overtemperature event.

Kit Contains: 20x TW70 Wraps, 20x TW90 Wraps, 20x Thermo-TA Labels, 20x Thermo-T-MAX Labels, 20x TSBB Labels, 20x TS52 Labels, 1x TP70-W/R-.5 Paint

Key Features



Simple Application

Easy and quick installation, simply apply to your electrical and mechanical assets with direct visibility.

Thermo-Lock Technology

Our patented thermochromic technology enables the indicators to change and lock color to signal elevated temperatures.

Cost-Effective Solution

Minimum investment for an increased and noticeable improvement to your Operations Safety and Reliability Program.



\bigcirc

Easy to Read

The thermochromic indicators provide a highly visible predictive warning.



Elevated Temperature Indication


Provides 24/7 monitoring and visual indication of elevated temperatures.



Passive Design

Temperature-responsive color changes as a passive visual alert system for hazard detection and prevention.



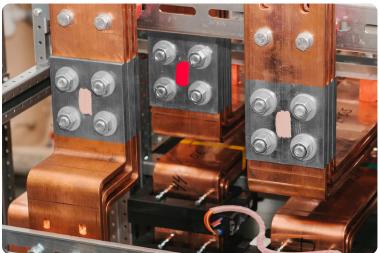

Specifications

Model	TW70	TW90	Thermo-TA	Thermo-T-MAX	TSBB	TS52	
General Specifications							
Adhesive Type	Acrylic						
Carrier	Polyester						
Covering Film	Polyester						
Response Time	2 to 5 seconds						
Color Change Material	Non-toxic, white crystalline solid on a black absorbent backing			Non-toxic, white crystalline solid on a red absorbent backing			
Activation Temperature	70°C / 158°F	90°C / 194°F	50°C / 122°F	50°C / 122°F	52°C / 126°F	52°C / 126°F	
Tolerance	Approx +/- 1°C						
Storage	Store at room temperature & humidity (i.e. 16°C to 27°C & 40% to 60% RH)						
Service Life	5 years			3 years			
Dimensions	18mm x 115 mm (0.71" x 4.53")	18mm x 115 mm (0.71" x 4.53")	55.5mm x 21.3mm (2.2" x 0.84")	55.5mm x 21.3mm (2.2" x 0.84")	100 mm x 45 mm (3.94 " x 1.77 ")	Ø 17mm (0.67")	

Specifications are subject to change without notice. For the most up-to-date specs, go to www.iriss.com

*Installation: Peel the Thermo-TA[™], Thermo Wrap[™], Thermo-T-MAX[™], Thermo Spot-B[™], or Thermo Spot[™] temperature-indicating label from the backing paper. Apply to a dust & grease free surface. If applying to a cable, preferably wrap the self-adhesive label around the cable and back on top of itself. For indoor use only.

*Caution: These labels are designed to use on electrical equipment and as such electrical safety must be assessed by a competent electrician prior to their application.

Model	TP70-W/R5				
General Specifications					
Container Size	0.5 fl oz				
Container Type	Bottle				
Base Materials	Silicone free water based acrylic with organic pigments				
Permanent Color Change Temperature	Approx 70°C – will show 50% full color strength at 70°C				
Permanent Color Change Color	Red				
Tolerance	Approx +/- 1°C, Heavier coatings will appear to show color earlier than thinner ones				
Response Time	5 to 20 Seconds at temperature of 70°C, approx 1 minute for full color change				
Storage	Store at room temperature & humidity not in excess of 25°C / 77°F, or cool but avoid freezing.				
Product Lifespan	12 months unopened				

Specifications are subject to change without notice. For the most up-to-date specs, go to www.iriss.com

*Limitations:

- The Safe-Connect Series of products are not suitable for unprotected use outdoors or in direct sunlight. They are vulnerable to degradation and nonperformance from prolonged exposure to ultra-violet (UV) light or high Relative Humidity.
- The Safe-Connect Series will not prevent electrical faults or fires but will aid in monitoring abnormal temperatures and will give visual indication of potential electrical faults and fire risks.
- The Safe-Connect Series do not replace the need to formally install, test, inspect and maintain electrical installations as per the Electricity at Work Act, Electrical Installations Wiring Regulations and Manufacturer's Instructions.
- This information is provided solely for consideration, investigation and verification by the user. The Safe-Connect Series of products are made to the highest standard however they are not suitable for all environmental applications. The customer must ensure that they are suitable for use in their application.







North America (HQ) +1 (941) 907-9128

LATAM +1 (941) 704-4445 EMEA +44 (0) 843-507-0099

APAC +1 (941) 704-4445 MENA +974 399 24 0 24

India +91 22 4969 0921

©2024 IRISS, Inc. All rights reserved. Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. Modification of this document is not permitted without written permission from IRISS Inc.

www.iriss.com

DS-0510-08-21-24